





DGTR/L : Integral shank parting and grooving toolholders.

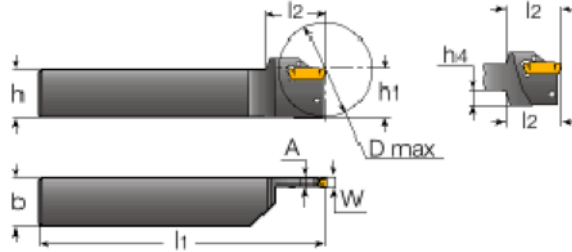

Right-hand shown



Left-hand shown



Designation	W min	W max	h	b	A	l1	l2	h4	D max
DGTL 1010-2	1.90	2.50	10.0	10.0	1.80	150.00	29.0	6.6	35.0
DGTR 1010-2	1.90	2.50	10.0	10.0	1.80	150.00	29.0	6.6	35.0
DGTL 1212-2	1.90	2.50	12.0	12.0	1.80	150.00	29.0	6.6	39.0
DGTR 1212-2	1.90	2.50	12.0	12.0	1.80	150.00	29.0	6.6	39.0
DGTL 1616-2	1.90	2.50	16.0	16.0	1.80	150.00	29.0	2.6	39.0
DGTR 1616-2	1.90	2.50	16.0	16.0	1.80	150.00	29.0	2.6	39.0
DGTL 2012-2	1.90	2.50	20.0	12.0	1.80	150.00	29.0	-	39.0
DGTR 2012-2	1.90	2.50	20.0	12.0	1.80	150.00	29.0	-	39.0
DGTL 1212-3	3.00	3.18	12.0	12.0	2.50	150.00	29.0	6.6	39.0
DGTR 1212-3	3.00	3.18	12.0	12.0	2.50	150.00	29.0	6.6	39.0
DGTL 1616-3	3.00	3.18	16.0	16.0	2.50	150.00	29.0	6.6	39.0
DGTR 1616-3	3.00	3.18	16.0	16.0	2.50	150.00	29.0	6.6	39.0
DGTL 2012-3	3.00	3.18	20.0	12.0	2.50	125.00	29.0	-	39.0
DGTR 2012-3	3.00	3.18	20.0	12.0	2.50	125.00	29.0	-	39.0
DGTL 2020-3	3.00	3.18	20.0	20.0	2.50	125.00	29.0	-	39.0
DGTR 2020-3	3.00	3.18	20.0	20.0	2.50	125.00	29.0	-	39.0
DGTL 2525-3	3.00	3.18	25.0	25.0	2.50	150.00	29.0	-	39.0
DGTR 2525-3	3.00	3.18	25.0	25.0	2.50	150.00	29.0	-	39.0
DGTL 2020-4	4.00	4.76	20.0	20.0	3.40	125.00	31.0	-	51.0
DGTR 2020-4	4.00	4.76	20.0	20.0	3.40	125.00	31.0	-	51.0
DGTL 2525-4	4.00	4.76	25.0	25.0	3.40	150.00	31.0	-	51.0
DGTR 2525-4	4.00	4.76	25.0	25.0	3.40	150.00	31.0	-	51.0
DGTL 2020-5	4.80	5.00	20.0	20.0	4.00	125.00	33.0	-	59.0
DGTR 2020-5	4.80	5.00	20.0	20.0	4.00	125.00	33.0	-	59.0
DGTL 2525-5	4.80	5.00	25.0	25.0	4.00	150.00	33.0	-	76.0
DGTR 2525-5	4.80	5.00	25.0	25.0	4.00	150.00	33.0	-	76.0
DGTL 2525-6	6.00	6.35	25.0	25.0	5.30	150.00	33.0	-	76.0
DGTR 2525-6	6.00	6.35	25.0	25.0	5.30	150.00	33.0	-	76.0

Insert limit is T_{max}=18 mm. If deeper penetration is required, the insert should be modified into single-ended by the user.

DG..1.0 insert can be mounted into pocket sizes 2 and 3. In that case the pocket width has to be modified-click on "More Info"