


C#-GHDR/L : External grooving turning and parting toolholders, with CAMFIX (ISO 26623-1 standard) exchangeable, tapered shanks.

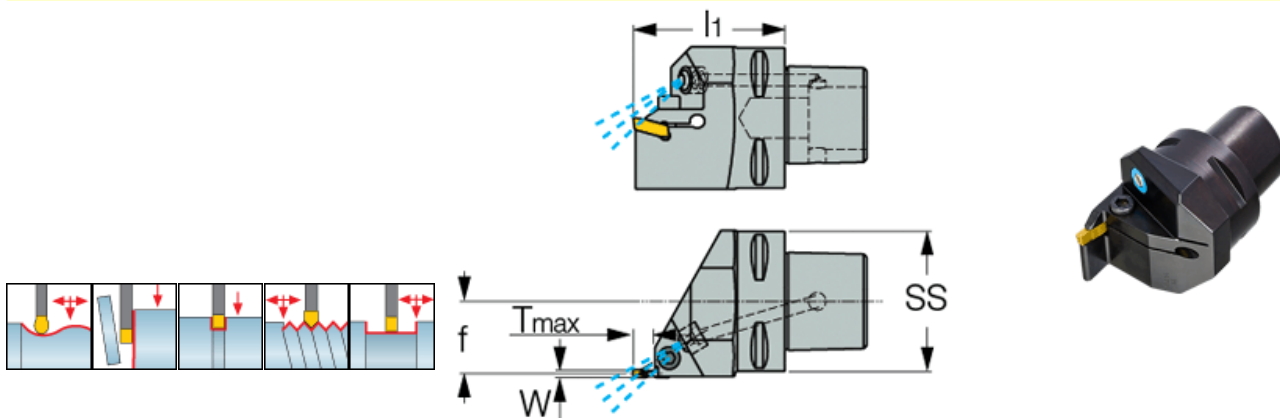

Designation	W min	W max	SS	Tmax-r	l1	f
C4 GHDL-3	2.8	4	40	9	55	20
C4 GHDR-3	2.8	4	40	9	55	20
C5 GHDL-3	2.8	4	50	9	55	24
C5 GHDR-3	2.8	4	50	9	55	24
C6 GHDL-3	2.8	4	63	9	55	32
C6 GHDR-3	2.8	4	63	9	55	32
C4 GHDL-4	4	5	40	10	55	20
C4 GHDR-4	4	5	40	10	55	20
C5 GHDL-4	4	5	50	10	55	24
C5 GHDR-4	4	5	50	10	55	24
C6 GHDL-4	4	5	63	10	55	32
C6 GHDR-4	4	5	63	10	55	32
C5 GHDL-5	5	6.4	50	12	55	24
C5 GHDR-5	5	6.4	50	12	55	24
C6 GHDL-5	5	6.4	63	12	55	32
C6 GHDR-5	5	6.4	63	12	55	32
C6 GHDL-8	7	8.4	63	25	70	30
C6 GHDR-8	7	8.4	63	25	70	30

When using GPV and TIP inserts, toolholder tip must be modified according to insert profile to ensure clearance.