





C#-GHDR/L : External grooving turning and parting toolholders, with CAMFIX (ISO 26623-1 standard) exchangeable, tapered shank

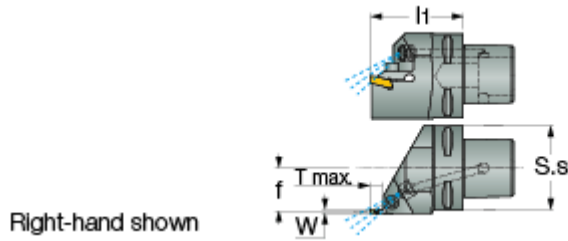

Right-hand shown



Designation	W min	W max	SS	Tmax-r	l1	f
C4 GHDL-3	2.80	4.00	40	9.00	55.00	20.0
C4 GHDR-3	2.80	4.00	40	9.00	55.00	20.0
C5 GHDL-3	2.80	4.00	50	9.00	55.00	24.0
C5 GHDR-3	2.80	4.00	50	9.00	55.00	24.0
C6 GHDL-3	2.80	4.00	63	9.00	55.00	32.0
C6 GHDR-3	2.80	4.00	63	9.00	55.00	32.0
C4 GHDL-4	4.00	5.00	40	10.00	55.00	20.0
C4 GHDR-4	4.00	5.00	40	10.00	55.00	20.0
C5 GHDL-4	4.00	5.00	50	10.00	55.00	24.0
C5 GHDR-4	4.00	5.00	50	10.00	55.00	24.0
C6 GHDL-4	4.00	5.00	63	10.00	55.00	32.0
C6 GHDR-4	4.00	5.00	63	10.00	55.00	32.0
C5 GHDL-5	5.00	6.40	50	12.00	55.00	24.0
C5 GHDR-5	5.00	6.40	50	12.00	55.00	24.0
C6 GHDL-5	5.00	6.40	63	12.00	55.00	32.0
C6 GHDR-5	5.00	6.40	63	12.00	55.00	32.0
C6 GHDL-8	7.00	8.40	63	25.00	70.00	30.0
C6 GHDR-8	7.00	8.40	63	25.00	70.00	30.0

When using GPV and TIP inserts, toolholder tip must be modified according to insert profile to ensure clearance.