


GHIUR/L-C-A(15?& 27.5?Bars : Internal grooving and turning bars for machining aluminum wheels.



Designation	W	d	D min	Tmax-r	l1	l2	f	F1	h1	a°/b>
GHIUL 40C-15A-6	6	40	160	-	320	83	21.2	19	18	15
GHIUR 40C-15A-6	6	40	160	-	320	83	21.2	19	18	15
GHIUL 40C-15A-8	8	40	160	0	320	83	21	18	18	15
GHIUR 40C-15A-8	8	40	160	0	320	83	21	18	18	15
GHIUL 50C-15A-8	8	50	100	0	350	83	26	23	23	15
GHIUR 50C-15A-8	8	50	100	0	350	83	26	23	23	15
GHIUL 40C-27.5A-6	6	40	90	0.6	320	80	25.1	23.5	18	27.5
GHIUR 40C-27.5A-6	6	40	90	0.6	320	80	25.1	23.5	18	27.5
GHIUL 40C-27.5A-8	8	40	108	1.6	320	81	25.2	23	18	27.5
GHIUR 40C-27.5A-8	8	40	108	1.6	320	81	25.2	23	18	27.5
GHIUL 50C-27.5A-8	8	50	120	1.8	350	82	30.2	28	23	27.5
GHIUR 50C-27.5A-8	8	50	120	1.8	350	82	30.2	28	23	27.5

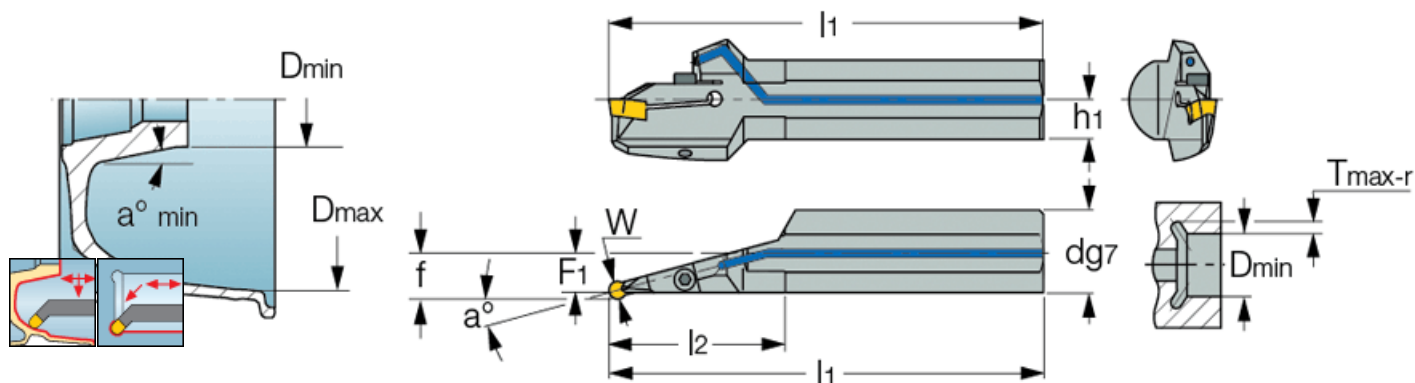