





**SDACR/L** : Screw lock toolholders for 55°diamond inserts with 7°clearance angle.

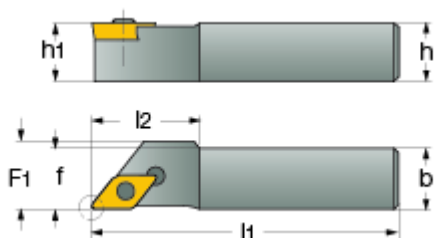

Right-hand shown



| Designation    | h    | h1   | b    | l1     | l2   | f    | F1   | Ga°/b> | Gr°/b> |
|----------------|------|------|------|--------|------|------|------|--------|--------|
| SDACL 1010M-07 | 10.0 | 10.0 | 10.0 | 150.00 | -    | 10.0 | -    | 0      | 0      |
| SDACR 1010M-07 | 10.0 | 10.0 | 10.0 | 150.00 | -    | 10.0 | -    | 0      | 0      |
| SDACL 1212M-07 | 12.0 | 12.0 | 12.0 | 150.00 | -    | 12.0 | -    | 0      | 0      |
| SDACR 1212M-07 | 12.0 | 12.0 | 12.0 | 150.00 | -    | 12.0 | -    | 0      | 0      |
| SDACL 1212M-11 | 12.0 | 12.0 | 12.0 | 150.00 | 20.0 | 12.0 | 14.0 | 0      | 0      |
| SDACR 1212M-11 | 12.0 | 12.0 | 12.0 | 150.00 | 20.0 | 12.0 | 14.0 | 0      | 0      |
| SDACL 1616M-11 | 16.0 | 16.0 | 16.0 | 150.00 | -    | 16.0 | -    | 0      | 0      |
| SDACR 1616M-11 | 16.0 | 16.0 | 16.0 | 150.00 | -    | 16.0 | -    | 0      | 0      |