



DR-MF-2.25D : Multifunction drilling, boring, facing and external turning tool.

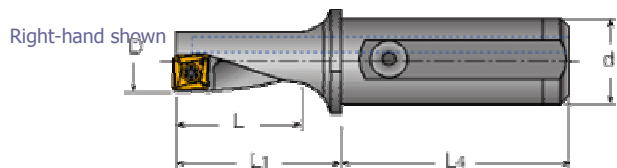

Designation	D	d	L	L1	L4	R/L
DR-MF-08R-2.25D-12A-04	8	12	18	22	38	R
DR-MF-10L-2.25D-12A-05	10	12	22.5	27.5	42	L
DR-MF-10R-2.25D-12A-05	10	12	22.5	27.5	42	R
DR-MF-12L-2.25D-16A-06	12	16	27	33	45	L
DR-MF-12R-2.25D-16A-06	12	16	27	33	45	R
DR-MF-14L-2.25D-16A-07	14	16	31.5	38.5	45	L
DR-MF-14R-2.25D-16A-07	14	16	31.5	38.5	45	R
DR-MF-16L-2.25D-20A-08	16	20	36	44	50	L
DR-MF-16R-2.25D-20A-08	16	20	36	44	50	R
DR-MF-20L-2.25D-25A-10	20	25	45	55	56	L
DR-MF-20R-2.25D-25A-10	20	25	45	55	56	R
DR-MF-25L-2.25D-32A-13	25	32	56.5	69	61	L
DR-MF-25R-2.25D-32A-13	25	32	56.5	69	61	R
DR-MF-32L-2.25D-40A-17	32	40	72	86	74	L
DR-MF-32R-2.25D-40A-17	32	40	72	86	74	R

In non-rotating applications hole diameter can be adjusted within the specified range by shifting drill's center line along machine's X-axis.

The tools have an internal coolant hole.