





TGTR/L : Integral shank tools with a very rigid clamping. Enables machining at very high feed rates and provides excellent straight finish. Recommended for parting interrupted cuts. Excellent tool and pocket life.

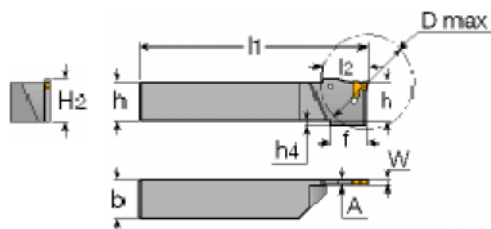

Right-hand shown



Right-hand shown

Designation	W	W min	W max	h	b	A	l1	H2	l2	f	h4	D max
TGTL 1010-1.4	1.40	1.40	1.45	10.0	10.0	1.05	140.00	15.0	-	15.50	5.0	20.0
TGTR 1010-1.4	1.40	1.40	1.45	10.0	10.0	1.05	140.00	15.0	-	15.50	5.0	20.0
TGTL 1212-1.4	1.40	1.40	1.45	12.0	12.0	1.05	140.00	12.0	-	16.00	3.0	30.0
TGTR 1212-1.4	1.40	1.40	1.45	12.0	12.0	1.05	140.00	12.0	-	16.00	3.0	30.0
TGTL 1616-1.4	1.40	1.40	1.45	16.0	16.0	1.05	140.00	16.0	-	-	-	30.0
TGTR 1616-1.4	1.40	1.40	1.45	16.0	16.0	1.05	140.00	16.0	-	-	-	30.0
TGTL 2020-1.4	1.40	1.40	1.45	20.0	20.0	1.05	140.00	20.0	-	-	-	30.0
TGTR 2020-1.4	1.40	1.40	1.45	20.0	20.0	1.05	140.00	20.0	-	-	-	30.0
TGTL 1010-2	2.00	1.80	2.40	10.0	10.0	1.65	150.00	15.0	-	15.50	5.0	28.0
TGTR 1010-2	2.00	1.80	2.40	10.0	10.0	1.65	150.00	15.0	-	15.50	5.0	28.0
TGTL 1212-2	2.00	1.80	2.40	12.0	12.0	1.65	150.00	15.0	-	17.00	3.0	32.0
TGTR 1212-2	2.00	1.80	2.40	12.0	12.0	1.65	150.00	15.0	-	17.00	3.0	32.0
TGTL 1612-2-L120	2.00	1.80	2.50	16.0	12.0	1.65	120.00	16.0	-	-	-	35.0
TGTR 1612-2-L120	2.00	1.80	2.50	16.0	12.0	1.65	120.00	16.0	-	-	-	35.0
TGTL 1616-2	2.00	1.80	2.40	16.0	16.0	1.65	150.00	16.0	-	-	-	35.0
TGTR 1616-2	2.00	1.80	2.40	16.0	16.0	1.65	150.00	16.0	-	-	-	35.0
TGTL 2012-2	2.00	1.80	2.40	20.0	12.0	1.65	125.00	20.0	-	-	-	35.0
TGTR 2012-2	2.00	1.80	2.40	20.0	12.0	1.65	125.00	20.0	-	-	-	35.0
TGTL 1212-3	3.00	2.80	3.50	12.0	12.0	2.50	150.00	19.0	-	19.00	7.0	32.0
TGTR 1212-3	3.00	2.80	3.50	12.0	12.0	2.50	150.00	19.0	-	19.00	7.0	32.0
TGTL 1612-3-L120	3.00	2.80	3.50	16.0	12.0	2.50	120.00	19.0	-	19.00	3.0	35.0
TGTR 1612-3-L120	3.00	2.80	3.50	16.0	12.0	2.50	120.00	19.0	-	19.00	3.0	35.0
TGTL 1616-3	3.00	2.80	3.50	16.0	16.0	2.50	150.00	19.0	-	19.00	3.0	35.0
TGTR 1616-3	3.00	2.80	3.50	16.0	16.0	2.50	150.00	19.0	-	19.00	3.0	35.0
TGTL 2012-3	3.00	2.80	3.50	20.0	12.0	2.50	125.00	20.0	-	-	-	43.0
TGTR 2012-3	3.00	2.80	3.50	20.0	12.0	2.50	125.00	20.0	-	-	-	43.0
TGTL 2020-3	3.00	2.80	3.50	20.0	20.0	2.50	120.50	21.7	23.4	-	-	54.0
TGTR 2020-3	3.00	2.80	3.50	20.0	20.0	2.50	120.50	21.7	23.4	-	-	54.0
TGTL 2525-3	3.00	2.80	3.50	25.0	25.0	2.50	150.50	26.7	23.4	-	-	56.0
TGTR 2525-3	3.00	2.80	3.50	25.0	25.0	2.50	150.50	26.7	23.4	-	-	56.0
TGTR 2525K-3	3.00	2.80	3.50	25.0	25.0	2.50	150.00	26.7	23.4	-	-	56.0
TGTL 2020-4	4.00	3.70	4.50	20.0	20.0	3.40	120.50	21.7	23.4	-	-	57.0
TGTR 2020-4	4.00	3.70	4.50	20.0	20.0	3.40	120.50	21.7	23.4	-	-	57.0
TGTL 2525-4	4.00	3.70	4.50	25.0	25.0	3.40	150.50	26.7	23.4	-	-	65.0
TGTR 2525-4	4.00	3.70	4.50	25.0	25.0	3.40	150.50	26.7	23.4	-	-	65.0
TGTL 2020-5	5.00	4.70	5.50	20.0	20.0	4.00	120.00	21.7	-	-	-	57.0

TGTR 2020-5	5.00	4.70	5.50	20.0	20.0	4.00	120.00	21.7	-	-	-	57.0
TGTL 2525-5	5.00	4.70	5.50	25.0	25.0	4.00	150.00	25.0	-	-	-	76.0
TGTR 2525-5	5.00	4.70	5.50	25.0	25.0	4.00	150.00	25.0	-	-	-	76.0
TGTL 2525-6	6.00	5.70	6.50	25.0	25.0	5.20	150.00	25.0	-	-	-	76.0
TGTR 2525-6	6.00	5.70	6.50	25.0	25.0	5.20	150.00	25.0	-	-	-	76.0

