




EC-A2 (Economical-Short) : SOLIDECO - economical type 2 flute, 30° helix center cutting short solid carbide endmills.

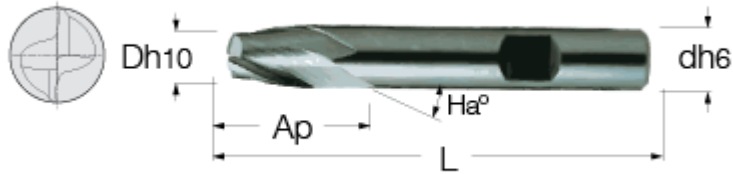

Designation	D	ap	d	L	Flute	Ha°	Rd°	Shank	fz(min)	fz(max)	Grade
EC-A2 02-03W06E50	2.00	3.00	6.00	50.00	2	30.0	5.0	W	0.01	0.03	IC08 IC900
EC-A2 03-04W06E50	3.00	4.00	6.00	50.00	2	30.0	5.0	W	0.01	0.04	IC08 IC900
EC-A2 035-04W06E50	3.50	4.00	6.00	50.00	2	30.0	5.0	W	0.01	0.04	IC08 IC900
EC-A2 04-05W06E54	4.00	5.00	6.00	54.00	2	30.0	5.0	W	0.02	0.05	IC08 IC900
EC-A2 045-05W06E54	4.50	5.00	6.00	54.00	2	30.0	5.0	W	0.02	0.05	IC08 IC900
EC-A2 05-06W06E54	5.00	6.00	6.00	54.00	2	30.0	5.0	W	0.02	0.06	IC08 IC900
EC-A2 06-07W06E54	6.00	7.00	6.00	54.00	2	30.0	5.0	W	0.03	0.07	IC08 IC900
EC-A2 07-08W08E58	7.00	8.00	8.00	58.00	2	30.0	5.0	W	0.03	0.08	IC08 IC900
EC-A2 08-09W08E58	8.00	9.00	8.00	58.00	2	30.0	5.0	W	0.03	0.09	IC08 IC900
EC-A2 09-10W10E66	9.00	10.00	10.00	66.00	2	30.0	5.0	W	0.03	0.09	IC08 IC900
EC-A2 10-11W10E66	10.00	11.00	10.00	66.00	2	30.0	5.0	W	0.03	0.10	IC08 IC900
EC-A2 12-12W12E73	12.00	12.00	12.00	73.00	2	30.0	5.0	W	0.04	0.11	IC08 IC900
EC-A2 14-14W14E75	14.00	14.00	14.00	75.00	2	30.0	5.0	W	0.04	0.12	IC08 IC900
EC-A2 16-16W16E82	16.00	16.00	16.00	82.00	2	30.0	5.0	W	0.05	0.13	IC08 IC900
EC-A2 18-18W18E84	18.00	18.00	18.00	84.00	2	30.0	5.0	W	0.05	0.13	IC08 IC900
EC-A2 20-20W20E92	20.00	20.00	20.00	92.00	2	30.0	5.0	W	0.05	0.13	IC08 IC900