





MM ERS : MULTI-MASTER interchangeable solid carbide, rough milling heads, used for high metal removal applications.

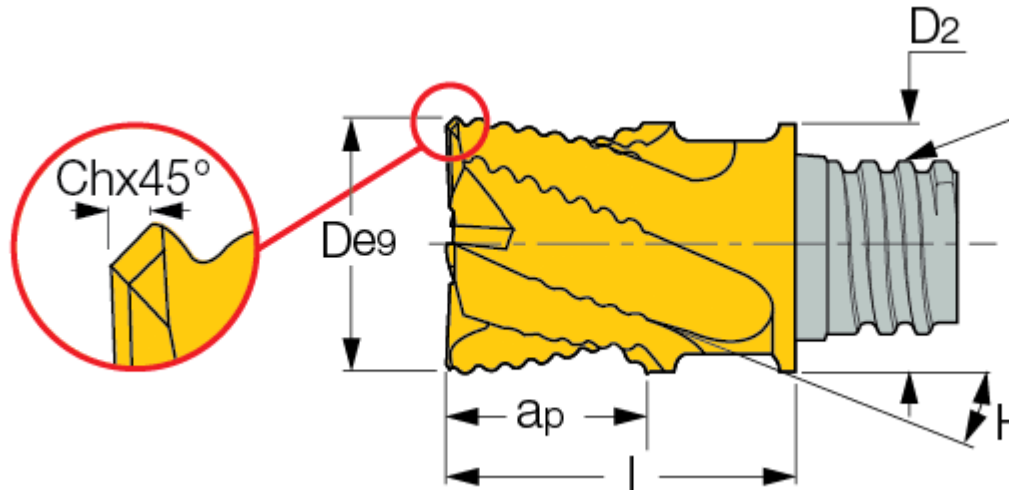

Designation	D	Flute	ap	Ts	D2	l	Ch	Ha°	Rd°	fz(min)	fz(max)	Grade
MM ERS080B05-4T05	8.00	4	5.00	T05	7.60	10.00	0.25	45.0	90.0	0.03	0.08	IC908
MM ERS080B09-4T05	8.00	4	9.00	T05	7.70	15.00	0.25	45.0	90.0	0.03	0.08	IC908
MM ERS100B07-4T06	10.00	4	7.00	T06	9.60	13.00	0.30	45.0	90.0	0.03	0.09	IC908
MM ERS120B09-4T08	12.00	4	9.00	T08	11.70	16.50	0.35	45.0	90.0	0.04	0.10	IC908
MM ERS120B09-4T08-H	12.00	4	9.00	T08	11.70	16.50	0.35	45.0	90.0	0.04	0.10	IC908
MM ERS120B14-4T08	12.00	4	14.00	T08	11.70	23.00	0.35	45.0	90.0	0.04	0.10	IC908
MM ERS.500B37-4T08	12.70	4	9.50	T08	12.40	16.50	0.35	45.0	90.0	0.04	0.10	IC908
MM ERS160B12-5T10	16.00	5	12.00	T10	15.20	20.50	0.40	45.0	7.0	0.04	0.10	IC908
MM ERS160B12-5T10-H	16.00	5	12.00	T10	11.70	20.50	0.4	45.0	7.0	0.04	0.10	IC908
MM ERS200B15-6T12	20.00	6	15.00	T12	18.30	25.50	0.40	45.0	3.0	0.05	0.11	IC908
MM ERS250B22-6T15	25.00	6	22.00	T15	23.90	37.00	0.50	45.0	3.0	0.05	0.11	IC908
MM ERS1.00B86-6T15	25.40	6	22.00	T15	23.90	37.00	0.50	45.0	3.0	0.04	0.10	IC908

For Clamping keys (should be ordered separately), tightening torques and clamping instructions, click on "More Info".

Do not apply lubricant to the threaded connection.