






TP6 (H.S.S.) : HSS right-hand 40° spiral flute, machine taps for ISO metric coarse threads, according to DIN 13, for hardened steel and temperature alloys.

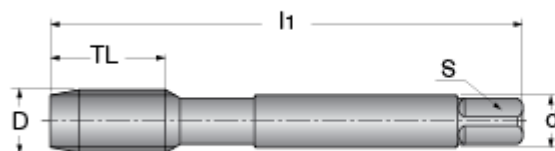

Designation	D	Pitch	l1	TL	d	S	Prehole	Ha°
TP6 M2X0.4-6H-CCH-HEV	M2	0.40	45.00	8.0	2.80	2.10	1.60	40.0
TP6 M2.2X0.45-6H-CCH-HEV	M2.2	0.45	45.00	8.0	2.80	2.10	1.75	40.0
TP6 M2.3X0.4-6H-CCH-HEV	M2.3	0.40	45.00	8.0	2.80	2.10	1.90	40.0
TP6 M2.5X0.45-6H-CCH-HEV	M2.5	0.45	50.00	9.0	2.80	2.10	2.05	40.0
TP6 M2.6X0.45-6H-CCH-HEV	M2.6	0.45	50.00	9.0	2.80	2.10	2.10	40.0
TP6 M3X0.5-6H-CCH-HEV	M3	0.50	56.00	6.0	3.50	2.70	2.50	40.0
TP6 M3.5X0.6-6H-CCH-HEV	M3.5	0.60	56.00	7.0	4.00	3.00	2.90	40.0
TP6 M4X0.7-6H-CCH-HEV	M4	0.70	63.00	7.0	4.50	3.40	3.30	40.0
TP6 M4.5X0.75-6H-CCH-HEV	M4.5	0.75	70.00	8.0	6.00	4.90	3.70	40.0
TP6 M5X0.8-6H-CCH-HEV	M5	0.80	70.00	8.0	6.00	4.90	4.20	40.0
TP6 M6X1-6H-CCH-HEV	M6	1.00	80.00	10.0	6.00	4.90	5.00	40.0
TP6 M7X1-6H-CCH-HEV	M7	1.00	80.00	10.0	7.00	5.50	6.00	40.0
TP6 M8X1.25-6H-CCH-HEV	M8	1.25	90.00	13.0	8.00	6.20	6.80	40.0
TP6 M9X1.25-6H-CCH-HEV	M9	1.25	90.00	13.0	9.00	7.00	7.80	40.0
TP6 M10X1.5-6H-CCH-HEV	M10	1.50	100.00	15.0	10.00	8.00	8.50	40.0
TP6 M11X1.5-6H-CBH-HEV	M11	1.50	100.00	17.0	8.00	6.20	9.50	40.0
TP6 M12X1.75-6H-CBH-HEV	M12	1.75	110.00	18.0	9.00	7.00	10.20	40.0
TP6 M14X2-6H-CBH-HEV	M14	2.00	110.00	20.0	11.00	9.00	12.00	40.0
TP6 M16X2-6H-CBH-HEV	M16	2.00	110.00	20.0	12.00	9.00	14.00	40.0
TP6 M18X2.5-6H-CBH-HEV	M18	2.50	125.00	25.0	14.00	11.00	15.50	40.0
TP6 M20X2.5-6H-CBH-HEV	M20	2.50	140.00	25.0	16.00	12.00	17.50	40.0