






TP2 (H.S.S.) : HSS gun point, DIN 376 machine taps for ISO metric coarse threads, according to DIN 13, for steel.

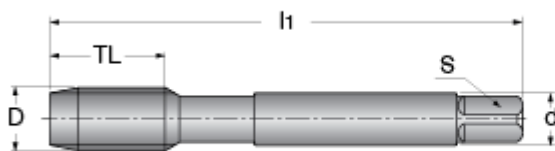

Designation	D	Pitch	l1	TL	d	S	Prehole	Standard
TP2 M3X0.5-6H-GBW-HE	M3	0.50	55.00	11.0	2.20	1.80	2.50	DIN 376
TP2 M4X0.7-6H-GBW-HE	M4	0.70	63.00	13.0	2.80	2.10	3.30	DIN 376
TP2 M5X0.8-6H-GBW-HE	M5	0.80	70.00	15.0	3.50	2.70	4.20	DIN 376
TP2 M6X1-6H-GBW-HE	M6	1.00	80.00	17.0	4.50	3.40	5.00	DIN 376
TP2 M7X1-6H-GBW-HE	M7	1.00	80.00	17.0	5.50	4.30	6.00	DIN 376
TP2 M8X1.25-6H-GBW-HE	M8	1.25	90.00	20.0	6.00	4.90	6.80	DIN 376
TP2 M9X1.25-6H-GBW-HE	M9	1.25	90.00	20.0	7.00	5.50	7.80	DIN 376
TP2 M10X1.5-6H-GBW-HE	M10	1.50	100.00	22.0	7.00	5.50	8.50	DIN 376
TP2 M11X1.5-6H-GBW-HE	M11	1.50	100.00	22.0	8.00	6.20	9.50	DIN 376
TP2 M12X1.75-6H-GBW-HE	M12	1.75	110.00	24.0	9.00	7.00	10.20	DIN 376
TP2 M14X2-6H-GBW-HE	M14	2.00	110.00	26.0	11.00	9.00	12.00	DIN 376
TP2 M16X2-6H-GBW-HE	M16	2.00	110.00	27.0	12.00	9.00	14.00	DIN 376
TP2 M18X2.5-6H-GBW-HE	M18	2.50	125.00	30.0	14.00	11.00	15.50	DIN 376
TP2 M20X2.5-6H-GBW-HE	M20	2.50	140.00	32.0	16.00	12.00	17.50	DIN 376
TP2 M3.5X0.6-6H-GBW-HE	M3.5	0.60	56.00	12.0	2.50	2.10	2.90	DIN 376
TP2 M4.5X0.75-6H-GBW-HE	M4.5	0.75	70.00	14.0	3.50	2.70	3.70	DIN 376