


**DIN69871-ER-BIN** : BALANCIN, DIN 6499 balanceable ER collet chucks with a DIN 69871 tapered shanks.



| Designation              | SS | CSI  | d<br>min | d<br>max | L   | L1    | L3 | D3 | D1 | G   | J       | Kg   |
|--------------------------|----|------|----------|----------|-----|-------|----|----|----|-----|---------|------|
| DIN69871 40 ER16X100 BIN | 40 | ER16 | 0.5      | 10       | 100 | 80.9  | 45 | 28 | 44 | M16 | M10     | 1.34 |
| DIN69871 40 ER16X160 BIN | 40 | ER16 | 0.5      | 10       | 160 | 140.9 | 86 | 28 | 44 | M16 | M10     | 0    |
| DIN69871 40 ER20X100 BIN | 40 | ER20 | 1        | 13       | 100 | 80.9  | 51 | 34 | 44 | M16 | M12     | 1.35 |
| DIN69871 40 ER20X160 BIN | 40 | ER20 | 1        | 13       | 160 | 140.9 | 87 | 34 | 44 | M16 | M12     | 1.88 |
| DIN69871 40 ER25X100 BIN | 40 | ER25 | 1        | 16       | 100 | 80.9  | 51 | 42 | 44 | M16 | M16X1.5 | 1.35 |
| DIN69871 40 ER25X160 BIN | 40 | ER25 | 1        | 16       | 160 | 140.9 | 88 | 42 | 44 | M16 | M16X1.5 | 1.83 |
| DIN69871 40 ER32X100 BIN | 40 | ER32 | 2        | 20       | 100 | 80.9  | 36 | 50 | 60 | M16 | M22X1.5 | 1.71 |
| DIN69871 40 ER32X160 BIN | 40 | ER32 | 2        | 20       | 160 | 140.9 | 96 | 50 | 60 | M16 | M22X1.5 | 2.62 |
| DIN69871 40 ER40X100 BIN | 40 | ER40 | 3        | 26       | 100 | 80.9  | 36 | 63 | 60 | M16 | M28X1.5 | 1.71 |

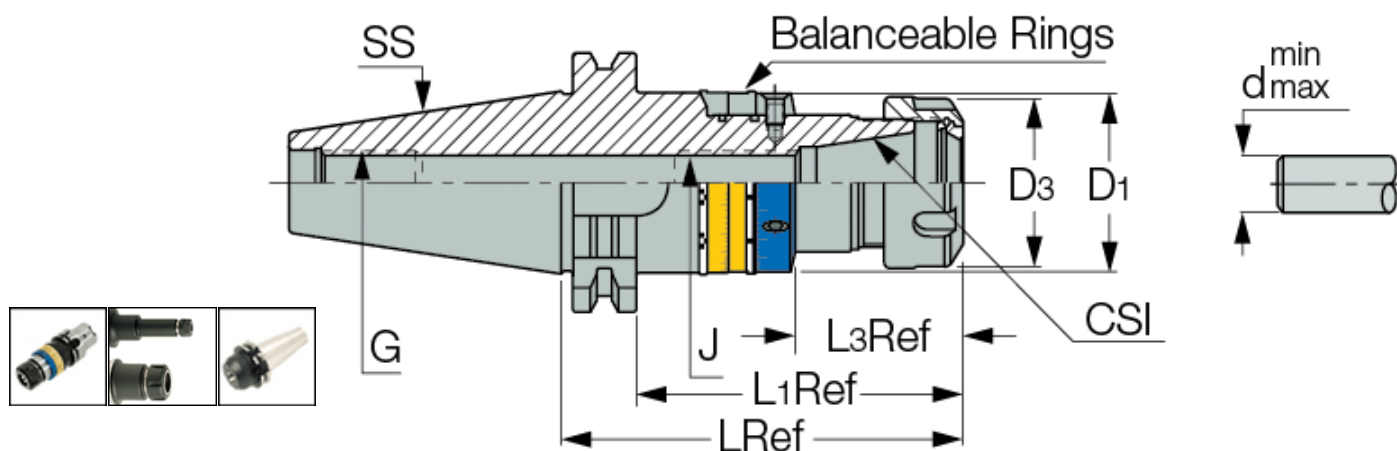

For Adaptation Click on "More Info".

Originally set value, can be improved by using a balancing machine.

Balanced to G2.5/20,000 RPM.