





**PICCO-MF** : Multifunction, solid carbide tools, for drilling, facing, int. and ext. turning on Swiss and small CNC machines. Part of the PASSPORT system.

Right-hand shown

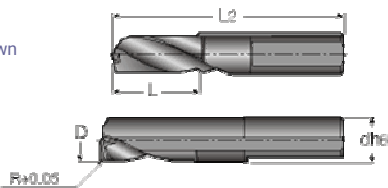

Designation	D	L	L2	d	R	R/L	Grade
PICCO R-MF 6-3 L06	3	6	28	6	0.1	R	IC908
PICCO L-MF 6-4 L08	4	8	30	6	0.1	L	IC908
PICCO R-MF 6-4 L08	4	8	30	6	0.1	R	IC908
PICCO L-MF 6-4 L12	4	12	34	6	0.2	L	IC908
PICCO R-MF 6-4 L12	4	12	34	6	0.2	R	IC908
PICCO L-MF 6-5 L10	5	10	32	6	0.1	L	IC908
PICCO R-MF 6-5 L10	5	10	32	6	0.1	R	IC908
PICCO L-MF 6-5 L15	5	15	41	6	0.3	L	IC908
PICCO R-MF 6-5 L15	5	15	41	6	0.3	R	IC908
PICCO L-MF 6-6 L12	6	12	34	6	0.1	L	IC908
PICCO R-MF 6-6 L12	6	12	34	6	0.1	R	IC908
PICCO L-MF 6-6 L18	6	18	43	6	0.3	L	IC908
PICCO R-MF 6-6 L18	6	18	43	6	0.3	R	IC908
PICCO L-MF 8-7 L14	7	14	41	8	0.1	L	IC908
PICCO R-MF 8-7 L14	7	14	41	8	0.1	R	IC908
PICCO L-MF 8-7 L21	7	21	55	8	0.3	L	IC908
PICCO R-MF 8-7 L21	7	21	55	8	0.3	R	IC908
PICCO L-MF 8-8 L16	8	16	43	8	0.1	L	IC908
PICCO R-MF 8-8 L16	8	16	43	8	0.1	R	IC908
PICCO L-MF 8-8 L24	8	24	58.5	8	0.3	L	IC908
PICCO R-MF 8-8 L24	8	24	58.5	8	0.3	R	IC908

Dmin can be 0.1 mm (.004") smaller by shifting tool center

Applications: Drilling; face turning; internal chamfering; internal turning\ boring; internal profiling; external chamfering; external turning.